

Airmux-400

Broadband Wireless Multiplexer (Ver. 2.6)



Carrier-class broadband radio solution for Ethernet and TDM traffic over license-free frequencies

- Carrier-class cost-effective broadband wireless radio system with Layer-2 Ethernet capabilities
- Net throughput of up to 200 Mbps aggregated (symmetric and asymmetric)
- Hybrid E1/T1 and Ethernet services on a single platform with transmission range of up to 120 km (75 miles)
- Multiband operation over 2.5 GHz, 3.5 GHz licensed and 4.8 to 5.8 GHz frequencies
- High reliability and availability based on robust air interface protocol

AIRMUX
ACCESS+

Airmux-400 is a carrier-class, cost-effective multiple point-to-point broadband wireless transmission device. It combines legacy TDM and Ethernet services for transmission over 2.5 GHz, 3.5 GHz licensed and 4.8 to 5.8 GHz bands, and is suitable for deployment in FCC, IC and ETSI-regulated countries.

For the global markets of cellular backhaul, WiMAX and ISP backhaul, broadband access,

large private and government networks, Airmux-400 offers high throughput, longer range and robustness at a competitive price.

RAD

data communications
The Access Company

Airmux-400

Broadband Wireless Multiplexer

In addition to Airmux-400, the Airmux-400L model is available as a cost-effective solution for backhaul and access application with Ethernet and TDM throughput of up to 50 Mbps.

The Airmux product line is part of RAD's Access+ portfolio for Multiservice Access Platform and First Mile solutions. The portfolio combines extensive support for legacy services with future-proof Ethernet capabilities to address the challenges faced by utilities, transportation networks, carriers, and mobile operators in migrating to next-generation networks and services with flexibility, efficiency and carrier-class reliability.

TYPICAL APPLICATIONS

The most common wireless applications are described below.

Service Providers and ISPs

Providing IP backhaul of 4G/broadband services in multiple point-to-point topologies, Airmux-400 offers broadband access for remote, rural and underserved communities:

- nLOS (no line of sight) in urban environment
- Long haul in rural setting (*Figure 2*).

Large corporate clients can build their networks to eliminate the recurring fee of

incumbent leased line services while maintaining a secured dedicated capacity per site.

Private Networks

Airmux-400 can be used in high-capacity interbranch connectivity applications for university campuses, health care organizations, government institutions, large enterprises and public establishments with high traffic requirements (*Figure 1*).

Mobile Carriers

In rural-to-urban cellular backhaul applications, Airmux-400 extends mobile reach to rural locations with carrier-grade, long-haul point-to-point E1/T1 and Ethernet services. It also can be used for backhaul of 3G traffic in urban environment with easy migration path from converged TDM/IP networks to all-IP networks.

Security and Surveillance

Aggregation and backhaul of traffic from multiple collocated megapixel video cameras, make Airmux-400 suitable for homeland security applications, municipal 'safe city' projects, border control installations.

AIRMUX-400 MODELS

The following models with different Ethernet or aggregate throughputs exist:

- Airmux-400 100M – 200 Mbps aggregated throughput with up to

16 E1/T1s. This model operates in the following modes:

- 100 Mbps full duplex with 40 MHz channel bandwidth
- 100 Mbps asymmetric with 10 and 20 MHz channel bandwidths and user-selectable uplink/downlink capacity (50–50% up to 95–5%)

Airmux-400L – Supporting up to 50 Mbps aggregated symmetric throughput and up to 8 E1/T1. Airmux-400L connectorized ODU includes a Small Form Factor (SFF) embedded antenna.

Airmux systems can be deployed to create a single point-to-point link, in a central site collocating a multiple point-to-point array of links, or as a resilient ring for Ethernet-only services.

Transmission range of up to 120 km (75 mi) is attainable with an external antenna.

PHYSICAL CONFIGURATIONS

Airmux multiplexers consist of a mast- or wall-mountable outdoor unit (ODU), an optional external antenna and an indoor unit (IDU) with redundant DC power supplies.

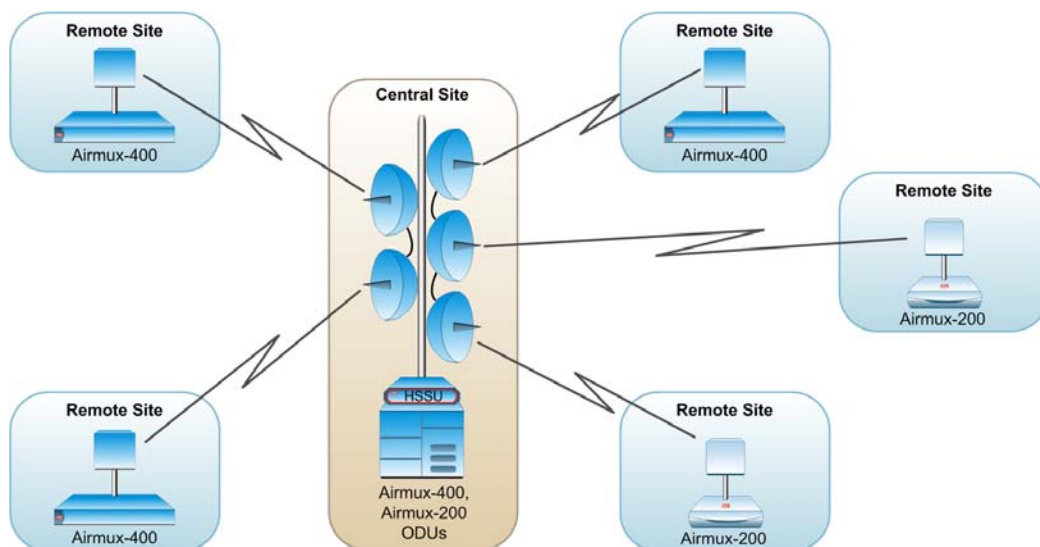


Figure 1. Enterprise Interbranch Connectivity

SUPERIOR SPECTRAL EFFICIENCY

Built on advanced MIMO and OFDM technologies, a pair of Airmux-400 units provides a high-capacity link at channel bandwidth of 10, 20 or 40 MHz (see *Table 1*). This guarantees a robust air interface able to withstand strong RF interference and harsh ambient conditions.

SECURITY

Data transmitted over the air interface is encrypted using Advanced Encryption System (AES) with a 128-bit encryption key.

AIR LINK QUALITY OF SERVICE

When the link quality is low, Airmux-400 automatically searches for a clear channel within a pre-selected list of frequencies.

SHORT TIME-TO-SERVICE

Because Airmux-400 operates in license-exempt frequencies, it can be deployed in record time, eliminating the costs and delays involved in leasing lines or trenching fiber.

SITE SYNCHRONIZATION

Hub Site Synchronization (HSS) assists in the collocation of multiple radios by reducing the interference that normally occurs when several radios transmit and receive in close proximity to one another. HSS enables a complex radio environment of mixed services (TDM and Ethernet) and channel bandwidth frequencies. The collocation feature requires ordering the HSS unit as well as its synchronization cables.

Note: Like any other RF deployment, the wireless operation is highly dependent on factors such as available frequencies, the physical space between radios, other interfering radios, and whether Airmux-400 units are used. HSS does not eliminate the need for careful RF planning to ensure the design will work as planned.

For long distance coverage, the synchronization can be obtained, using a GPS Synchronization Unit (GSU). The GSU reduces the interference between the collocated radios by providing a GPS signal simultaneously to ODUs at all locations.

1+1 LINK REDUNDANCY

The Monitored Hot Standby (MHS) 1+1 link redundancy protects the wireless transmission against equipment failure or air interface loss. Link switchover is performed in less than 50 msec.

DIVERSITY

With dual bipolar antennas, Airmux-400 links can be configured to transmit the same data through both radios. This ensures data transmission integrity under harsh conditions.

RESILIENT ETHERNET RING

Ethernet rings are used to protect data against link and node failures.

LAN PORTS

The IDU-E devices include three LAN ports: two Fast Ethernet UTP (RJ-45) and one SFP slot.

The regular IDUs have two 10/100BaseT ports.

With RAD's MiTOP-E3/T3, SFP-based TDM pseudowire gateway, Airmux-400 delivers E3/T3 data streams over its wireless link.

MANAGEMENT

A single SNMP-based network management application (Airmux Manager) is used to control multiple Airmux-400 and Airmux-200 links as a unified network.

RADview-EMS, RAD's SNMP-based management software provides access to the Airmux Manager via its topology map.

The Airmux Manager Spectrum View utility is an RF survey tool enabling the link installation prior to full link service activation. It provides comprehensive and clear spectral measurement information for easier installations.

Specifications

RADIO

Regulation

FCC/IC:

FCC 47CFR, Part 15, Subpart C,
FCC 47CFR, Part 15, Subpart E
FCC 47CFR, Part 90, Subpart Y
RSS-111
IC RSS-210

ETSI:

ETSI EN 302 502
ETSI EN 301 893

Duplex Technique

TDD

Transmit Power

See *Table 2*

Modulation

2 x 2MIMO-OFDM, see *Table 2*

Error Correction

FEC, k = 1/2, 2/3, 3/4, 5/6, see *Table 1*

Sensitivity

See *Table 1* (measured at BER < 10E-11, 20 MHz)

Encryption

AES 128

Throughput

Airmux-400L (full duplex):

Up to 50 Mbps aggregated (Ethernet
and up to 8 E1/T1 combined)

Airmux-400 (full duplex):

Up to 200 Mbps aggregated (Ethernet
and up to 16 E1/T1 combined)

Frequencies and Channel Bandwidths

Band [GHz]	Bandwidth			
	5 MHz	10 MHz	20 MHz	40 MHz
5.8	FCC/IC			
	ETSI			
5.4	-	FCC/IC		
5.3	FCC/IC			
	-	ETSI		
4.9	FCC/IC			-
3.4	ETSI, IC			-
3.6	FCC/IC			-
2.4	FCC/IC			-

Airmux-400

Broadband Wireless Multiplexer

TDM INTERFACE

Number of Ports

2, 4, 8 or 16

Type

E1/T1

Framing

Transparent to framing mode

Timing

Plesiochronous (independent Tx and Rx)

Line Code

E1: HDB3

T1: B8ZS, AMI

Latency

8 msec

Line Impedance

E1: 120Ω, balanced

T1: 100Ω, balanced

Jitter and Wander

As per G.823, G.824

Connector

RJ-45

LAN INTERFACE

Number of Ports

3

Type

2 × 10/100BaseT, autonegotiation (802.3u)

1 × SFP

Framing/Coding

IEEE 802.3u

Bridging

Up to 2048 MAC addresses self-learning

Traffic Handling

MAC layer bridging, self-learning

Latency

3 msec (typical)

Line Impedance

100Ω

VLAN Support

802.1p & Q

MANAGEMENT

Protocol

SNMP, Telnet

Interface

10/100BaseT

Connector

RJ-45

Upgrade Capabilities

Local and over-the-air software download

SFP PORT

Type

Fast Ethernet, for full details, see the *SFP Transceivers data sheet* at www.rad.com

*Note: It is strongly recommended to order this device with **original RAD SFPs installed**. This ensures a comprehensive functional quality test on the entire assembled unit prior to shipping. RAD cannot guarantee full compliance to product specifications for units using non-RAD SFPs. For detailed specifications of the SFP transceivers, see the *SFP Transceivers data sheet*.*

INTEGRATED ANTENNA

Characteristics

See *Table 2*

EMBEDDED ANTENNA (AIRMUX-400L)

Characteristics

See *Table 3*

GENERAL

Diagnostics

Local and remote loopbacks

IDU-to-ODU Connection

Outdoor Cat.5e cable, 100m (328 ft) max. length

Grounding and Lightning Protection

Individual grounding for each IDU/ODU

Internal arrestors for lightning protection

Internal ESD protection circuits over power/telecom lines

Optional lightning protection kit

Power

DC: -20 to -60 VDC (AC/DC power adapter can be ordered separately)

Power Consumption

35W max (ODU with IDU)

Indicators

IDU (green/orange/red): IDU status

ODU (green/red): ODU status

AIR I/F (green/orange/red): Air link status

SVC (green/orange/red): TDM service status

HSS (green/orange/red): HSS status

STBY (green/orange/red): MHS status

LINK (yellow): Ethernet link status

ACT (green): Ethernet activity status

Environment

Outdoor unit and external antenna:

Enclosure: IP67 all-weather case

Temperature: -35° to 60°C

(-31° to 140°F)

Indoor units:

Temperature: 0° to 50°C

(32° to 122°F)

Humidity: Up to 90%, non-condensing

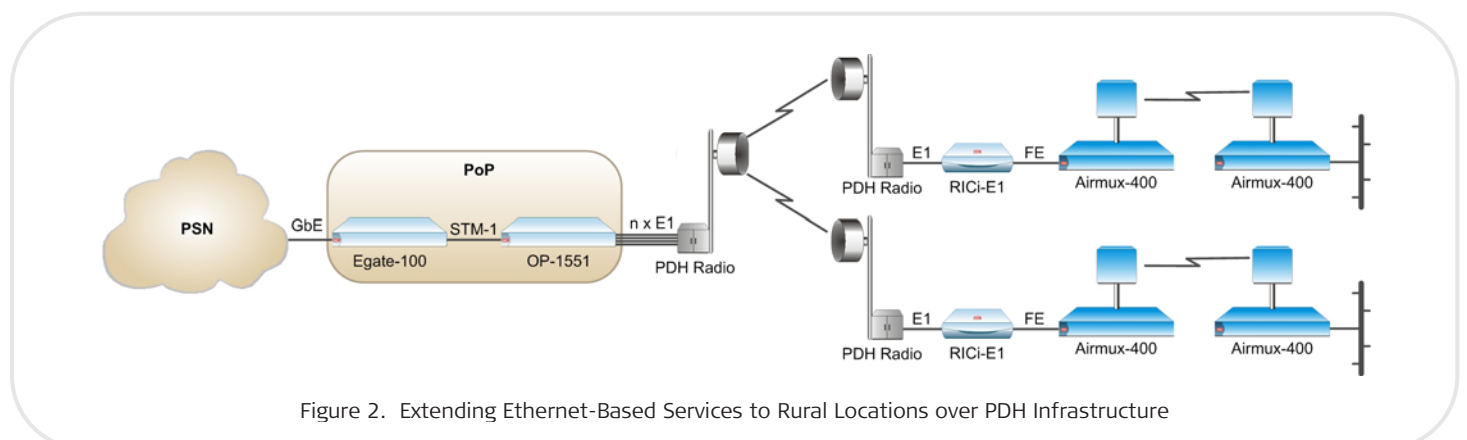


Figure 2. Extending Ethernet-Based Services to Rural Locations over PDH Infrastructure

Physical

ODU (with integrated antenna):

Height: 371 mm (14.8 in)

Width: 371 mm (14.8 in)

Depth: 90 mm (3.54 in)

Weight 3.5 kg (7 lb)

ODU (with embedded antenna):

Height: 270 mm (10.62 in)

Width: 195 mm (7.67 in)

Depth: 90 mm (3.54 in)

Weight 1.8 kg (3.6 lb)

ODU (used with external antenna):

Height: 286 mm (11.25 in)

Width: 197 mm (7.75 in)

Depth: 76 mm (3.0 in)

Weight 2.34 kg (5.15 lb)

IDU:

Height: 44 mm (1.7 in)

Width: 237 mm (9.3 in)

Depth: 165 mm (6.5 in)

Weight 0.5 kg (1.1 lb)

IDUE:

Height: 44 mm (1.7 in)

Width: 436 mm (17.2 in)

Depth: 210 mm (8.3 in)

Weight 1.5 kg (3.3 lb)

Table 1. Radio Link Characteristics

Modulation	Rate		FEC [k =]	Max Tx Power		Sensitivity [dBm]
	Single Antenna [Mbps]	Dual Antenna [Mbps]		4.8-6 GHz [dBm]	2.4 GHz [dBm]	
BPSK	6.5	13	1/2	25	26	-88
QPSK	13	26	1/2			
		19.5	39	3/4		
16 QAM	26	52	1/2	24	25	-81
	39	78	3/4	21	24	-77
64 QAM	52	104	2/3	19	24	-72
	58.5	117	3/4	18	21	-70
	65	130	5/6		20	-67

Table 2. Integrated Antenna Characteristics

Antenna Type	Frequency [GHz]	Gain [dBi]	Beam [degrees]	Dimensions		Weight	
				[mm]	[inch]	[kg]	[lb]
Flat panel, Dual Polarization	4.9x-5.875	19 (4.9x GHz) 23 (5.x GHz)	9	371x371x40	14.6x14.6x1.5	2.5	5.5
Flat panel, Dual Polarization	2.400	17.5	16	371x371x40	14.6x14.6x1.5	2.5	5.5
Flat panel, Dual Polarization	3.4-3.7	21	12	371x371x11	14.6x14.6x0.4	3.5	7

Note: For description of external antennas, see Airmux-400 External Antennas data sheet at www.rad.com.

Table 3. Embedded Antenna Characteristics

Antenna Type	Frequency [GHz]	Gain [dBi]	Polarization	Beam Width		Lightning Protection
				Azimuth 3 dB	Elevation 3 dB	
Flat panel	4.9-5.15	13.0 ±1	Dual Linear	35°	15°	DC Grounded
Flat panel	5.15-5.47	15.0 ±1	Dual Linear	35°	15°	DC Grounded
Flat panel	5.47-5.875	15.5 ±1	Dual Linear	35°	15°	DC Grounded
Flat panel	5.875-6.02	12.5 ±1	Dual Linear	35°	15°	DC Grounded

Airmux-400

Broadband Wireless Multiplexer

Ordering

Airmux-400/IDUE/*

Indoor unit with redundant DC power supply

Legend

* IDU-E interface:

- 4TDM** 4 TDM ports, 3 Ethernet ports (10/100 Mbps) (2 UTP + 1 SFP)
- 8TDM** 8 TDM ports, 3 Ethernet ports (10/100 Mbps) (2 UTP + 1 SFP)
- 16TDM** 16 TDM ports, 3 Ethernet ports (10/100 Mbps) (2 UTP + 1 SFP)
- 2GbE** 2 Gigabit Ethernet ports (2 GbE + 1 SFP)

Note: Enhanced Ethernet capabilities (VLANs and QoS) and resilient ring topology are supported by Airmux-400/IDUE/2GbE model only.

Airmux-IDU/%

Indoor unit with single DC power supply

% IDU interface:

- 2TDM** 2 TDM (E1/T1) interfaces, 2 ETH interfaces, alarm port
- 2ETH** 2 ETH interfaces

Notes:

- Enhanced Ethernet capabilities (VLANs and QoS) and resilient ring topology supported by both IDU/2TDM and IDU/2ETH models.
- For AC power feeding, order external power adapter (Airmux-PS-E-AC/a). See Optional Accessories below.

Airmux/PoE/GbE/DC

Power over Ethernet (PoE) device with a 100/1000BaseT interface and 48 VDC power feeding

Airmux-PoE/GbE/a

PoE device with 100BaseT/GbE interface and AC power feeding

Legend

a Power cable with matching plug:

- ACEU** Europe
- ACUS** US

Airmux-OPOE/DC

Outdoor PoE device with wide range VDC power feeding (-20 to -60 VDC).

Note: A PoE device eliminates the need for ordering an IDU-E. If requires, the AC power adapter can be used.

Airmux-400/ODU/#/+

Outdoor unit with integrated antenna

Airmux-400/ODU/@/+EXT

Outdoor unit for external antenna connection

Airmux-400L/ODU/^/EMB

Outdoor unit with an embedded antenna and connector for external antennas. Supports 50-Mbps Ethernet throughput only

Frequency band and regulation:

- F25F** 2.5 GHz, FCC/BRS with 100-Mbps Ethernet throughput only

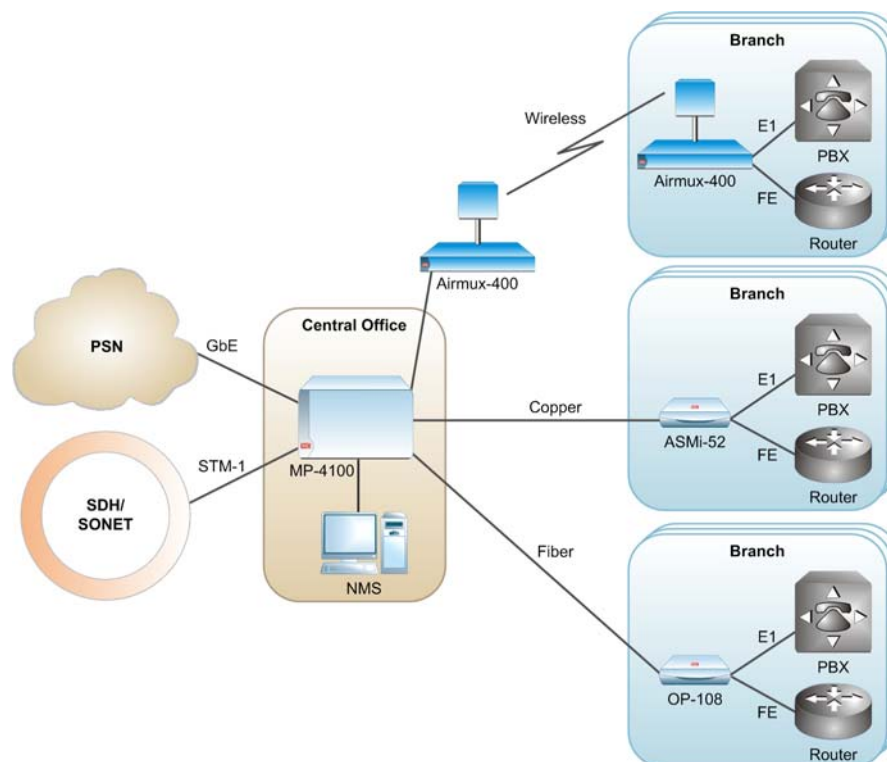


Figure 3. Providing Access for Multisite Connectivity

- F3XF** 3.x GHz FCC/IC (default – 3.65 GHz FCC/IC), 100 Mbps Ethernet throughput only
 - F3XE** 3.x GHz ETSI (default – 3.5 GHz ETSI) with 100-Mbps Ethernet throughput only
 - F49F** 4.9 GHz, 5.x GHz (default – 4.9 GHz FCC/IC) with 100-Mbps Ethernet throughput only
 - F54E** 5.x GHz (default – 5.4 GHz ETSI)
 - F58F** 5.x GHz (default – 5.8 GHz FCC/IC)
- @ Frequency band and regulation:
- F2449F** 2.x GHz, 4.9 GHz, 5.x GHz (default – 4.9 GHz FCC/IC), 100 Mbps Ethernet throughput only
 - F25F** 2.5 GHz, FCC/BRS, 100 Mbps Ethernet throughput only
 - F3XF** 3.x GHz (default 3.65 GHz FCC/IC), 100 Mbps Ethernet throughput only
 - F3XE** 3.x GHz ETSI (default – 3.5 GHz ETSI)
 - F2458F** 2.x GHz, 5.x GHz (default – 5.8 GHz FCC/IC)
 - F54E** 5.x GHz (default – 5.4 GHz ETSI)

- ^ Frequency band and regulation:
 - F49F** 4.9 GHz, 5.x GHz (default – 4.9 GHz FCC/IC)
 - F50F** 5.x GHz FCC/IC (default- 5.8 GHz)
 - F50E** 5.x GHz ETSI (default-5.4 GHz)
- + Ethernet throughput:
 - 100M** 100 Mbps
 - 200M** 200 Mbps

OPTIONAL ACCESSORIES

Airmux-400/ANT/\$
External antenna with 1m (3.3 ft) cable. **grid** stands for a grid antenna, **fp** – a flat panel antenna, and **dish** – a dish antenna.

Legend

- \$ External antenna:
 - 19/2427/fp** 19 dBi, 2.30–2.70 GHz, 2.3, 2.4, 2.5 GHz bands
 - 21/3338/fp** 21 dBi, 3.30–3.80 GHz
 - 22/4451/fp** 22 dBi, 4.40–5.10 GHz, 4.8, 4.9 GHz
 - 23/4958/fp** 23 dBi, 4.90–6.06 GHz bands
 - 28/5260/DISH** 28dBi, 4.90–6.06 GHz bands
 - 32/4958/DISH** 32dBi, 4.90–5.875 GHz bands

Note: For detailed description of external antennas, see *Airmux-400 External Antennas data sheet* at www.rad.com.

CBL-Airmux-UTP/@

Assembled cable for connection between IDU and ODU

Legend

- @ Cable length:
 - 25** 25m (82 ft)
 - 50** 50m (164 ft)
 - 75** 75m (246 ft)
 - 100** 100m (328 ft)



Airmux-PS-E-AC/a

Power adapter for IDU and IDU-E, 90–240 VAC to 48 VDC

Legend

- a AC adapter plug:
 - ACEU** Europe
 - ACUS** US

Table 4. Airmux Family Product Comparison

Features	 Airmux-200 (Ver. 1.9.3)		 Airmux-400 (Ver. 2.6)	
	Airmux-200	Airmux-400L	Airmux-400/100	Airmux-400/200
Bandwidth (Mbps)	18	50 total (Ethernet + TDM)	100 total (Ethernet + TDM)	200 total (Gigabit Ethernet)
Services	2 Ethernet + 1, 2, 4 E1/T1	Up to 3 Ethernet + up to 8 E1/T1	Up to 3 Ethernet + up to 16 E1/T1	Up to 2 Gigabit Ethernet ports
HSS	✓	✓	✓	✓
Maximum range (km/mi)	80/50	120/75	120/75	120/75

Airmux-400

Broadband Wireless Multiplexer

Airmux-HSSU

Hub site sync unit to connect 8 collocated outdoor units and 2 additional HSS units

Airmux-GSU/a

Outdoor GPS-based synchronization kit (GSU, GPS antenna, 1.5m (4.9 ft) RF cable, CBL-Airmux-HSS/5 cable, PoE unit, and mounting kits for GSU and GPS antenna)

a Power cable with matching plug:

ACEU	Europe
ACUS	US

CBL-Airmux-HSS/@@

Assembled cable for HSS connection

Legend

@@ Cable length:

5	5m (16.4 ft)
15	15m (49.2 ft)
50	50m (164 ft)
100	100m (328 ft)

Airmux-MHS-kit

Cable and patch panel assembly (8 × RJ-45 Y-connections) for Monitored Hot Standby configuration

Airmux-Lightning-Protection

Outdoor lightening protection unit for 10/100/1000BaseT surge protection. Includes 0.5m (1.64 ft) CAT5e cable and wall/pole mounting kit.

581-101-02/12 (2.6) Specifications are subject to change without prior notice. © 2003-2012 RAD Data Communications Ltd. The RAD name, logo, logotype, and the terms EtherAccess, TDMoIP and TDMoIP Driven, and the product names Optimux and Pmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

International Headquarters

24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

North America Headquarters

900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-529-1100
Toll free 1-800-444-7234
Fax 201-529-5777
E-mail market@rad.com

www.rad.com

Order this publication by Catalog No. 803823



data communications

The Access Company