

SFP-9F

100Base-TX Copper SFP



- 100Base TX interface in the SFP slot
- Ethernet autonegotiation
- Link state propagation
- Automatic MDI/MDIX for a straight and cross-cable connection
- IEEE 802.3 and SFP MSA compliance
- Lead-free

System™
on an **SFP**

Cost-Effective Ethernet Conversion

SFP-9F is a hot-swappable Ethernet electrical interface SFP (Small Form-Factor Pluggable) module that offers 100Base TX interface in the SFP slot.

LVPECL to MLT-3 Conversion

The host transmits the serial differential LVPECL data stream, which the SFP-9F module converts into MLT-3 encoded data towards the Ethernet line.

In the other direction, SFP-9F converts the MLT-3 signal received from the Ethernet line into serial differential LVPECL data stream towards the host

Operation Flexibility in Ethernet Environments

SFP-9F operates in 100 Mbps full-duplex mode (autonegotiation is set to Disable), or autonegotiation mode with 100 Mbps full-duplex advertised (autonegotiation is set to Enable). The operation mode is configured manually via the DIP switch on the underside of the device.

SFP-9F provides an automatic MDI/MDIX for connecting straight-through or cross-cables. When detected, the status of an Ethernet link is visually indicated by the module's LINK/ACT LED.

When there is no established link on the Ethernet line, the fault propagation mechanism automatically disrupts the link between SFP-9F and the PHY on the host board. The link is re-established when the link on the Ethernet line is restored.

Compliance and Structure

SFP-9F complies with the IEEE 802.3 and SFP MSA requirements.

The module is housed in a Small Form-Factor Pluggable (SFP) package, with a special release mechanism to easily extract the device from the socket.

The SFP-9F components are lead-free.



SFP-9F

100Base-TX Copper SFP

Specifications

100BASE-TX INTERFACE

Compliance

IEEE 802.3

Cable Type

UTP CAT-5

Range

100m (328 ft)

Connector

RJ-45

HOST INTERFACE

Host Edge Connector

SFP-based, MSA-compliant

GENERAL

Regulatory Compliance

Safety: IEC 60950-1

EMI: EN55022, EN55024

Indicators

LINK/ACT (green) –

Off: No Ethernet link

On: Ethernet link is OK

Blinking: Data is being transmitted or received

Single blink: On power-up

Physical

Height: 12.4 mm (0.48 in)

Width: 14.0 mm (0.55 in)

Depth: 74.1 mm (2.91 in)

Weight: 30.0g (1.06 oz)

Power Supply

3.3V ± 5%

Typical Power Consumption

0.75W

Environment

Temperature:

Operating: -40°–70°C (-40°–158°F)

Storage: -40°–100°C (-40°–212°F)

Humidity: Up to 90%, non-condensing

Ordering

SFP-9F

100Base-TX copper SFP

Note: It is strongly recommended to order RAD products with original RAD SFPs installed. This will ensure that prior to shipping, RAD has performed comprehensive functional quality tests on the entire assembled unit, including the SFP devices. RAD cannot guarantee full compliance to product specifications for products using non-RAD SFPs.

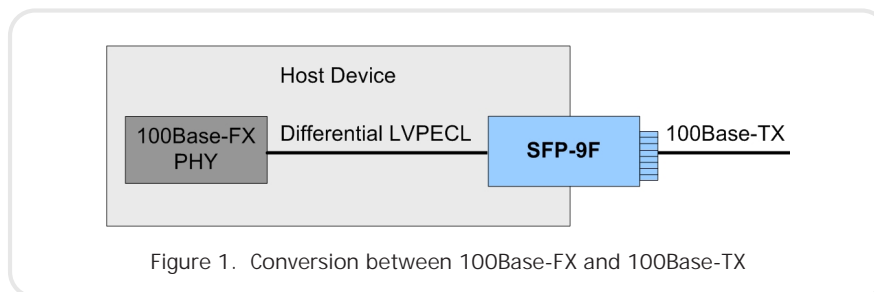


Figure 1. Conversion between 100Base-FX and 100Base-TX

International Headquarters

24 Raoul Wallenberg Street
Tel Aviv 69719, Israel
Tel. 972-3-6458181
Fax 972-3-6498250, 6474436
E-mail market@rad.com

North American Headquarters

900 Corporate Drive
Mahwah, NJ 07430, USA
Tel. 201-5291100
Toll free 1-800-4447234
Fax 201-5295777
E-mail market@radusa.com

www.rad.com

Order this publication by Catalog No. 000000



Your Network's Edge