

# SecFlow-1

## Ruggedized SCADA-Aware Router Gateway



- Compact ruggedized SCADA-aware router gateway for serial and Ethernet devices, supporting IEC-101, IEC-104, Modbus, and DNP3 protocols
- Resilient 3G/HSPA+/LTE cellular network uplink for maximum service continuity with multi-service Ethernet and Serial (RS-232/RS-485) interfaces
- L3 VPN with IPsec for secure connection over public networks
- Zero Touch provisioning
- Stateful Firewall
- IEC 61850-3/IEEE1613
- Withstands harsh environment

SecFlow<sup>®</sup>-1 is an Ethernet router gateway, a member of RAD's SecFlow suite of ruggedized Ethernet products.

With a unique built-in packet processing SCADA-aware engine, it fits mission-critical industrial applications. It is most suitable for infrastructure at utility companies with remotely distributed sites, connected to a SCADA control center. SecFlow-1 is installed at remote locations, forwarding Ethernet or serial traffic over fiber optic or cellular links.

SecFlow-1 features one FE UTP port and one GbE SFP port, two serial RS-232 ports or one RS-232 plus one RS-485, and a cellular modem with two SIM cards for maximum link resiliency.

SecFlow-1 utilizes Ethernet ports for new IEC 61850 compliance IEDs for automation in substations.

SecFlow-1 is equipped with serial interfaces for connectivity of legacy RTUs with new IP-based IEDs. SecFlow-1 gateway converts legacy IEC-101 protocol to IP-based IEC-104, enabling seamless communication from the IP SCADA to both the old and new RTUs. This provides a single box solution for multi-service applications and smooth migration to all-IP networks.

The gateway is designed for installation under harsh environmental conditions. It features DIN-rail mount, IP30 protection level, wide operating temperature range (-40°C to 70°C) without fans, and EMI immunity (IEC61850-3, IEEE1613, and EN50121-4).

### MARKET SEGMENTS AND APPLICATIONS

SecFlow-1 addresses the following Industrial IOT:

- Distributed automation in secondary substations
- Smart meter concentration
- Water Resources Management
- Retail
- Out-of-band management using cellular uplink

### INTEROPERABILITY

SecFlow-1 operates with SecFlow-2 and SecurityGateway.

### ROUTER AND VPN SERVICES

SecFlow-1 features static routing, OSPF, BGP, VRF and NAT.

The device features a VPN gateway with two operation modes:

- Inter-site connectivity using IPsec tunnels
- Remote user access, using SSH

Inter-site VPN based on IPsec encrypted link ensures L3 transparent connection of the Ethernet networks sites.

For remote access, the router uses an SSH-encrypted tunnel, with user authentication and specific access authorization.

### MANAGEMENT AND SECURITY

The device can be managed via:

- RADview, RAD's carrier-class NMS management system
- SecFlow web-based interface (HTTP/HTTPS)

SecFlow-1 also supports a variety of access protocols, including CLI and TFTP.

### Stateful Firewall

Based on pre-defined rules, the stateful firewall monitors and manages all the traffic passing through the device. Packets that are out of communication context or not allowed are dropped, and the relevant events are reported to the management system. The firewall is set up using the Firewall configurator tool that can configure multiple firewall rules.

For more information, refer to the RADview online help.



# SecFlow-1

## Ruggedized SCADA-Aware Router Gateway

### Off-net Zero Touch Provisioning

Using Zero Touch mechanism, SecFlow-1 can securely connect to a bootstrap server over the public network and download a customized file containing bootstrapping data. This ensures secure mass provisioning of configuration files and device software to the remote devices.

For more information, refer to the SecFlow-1 installation and operation manual, and RADview online help.

## Specifications

### ETHERNET INTERFACES

#### Fast Ethernet Port

1 x 10/100BASE-T, RJ-45 connector

Autonegotiation IEEE 802.3ab

#### GbE Port

SFP socket

100BASE-FX/1000BASE-SX/LX

10/100/1000BASE-TX

Autonegotiation IEEE 802.3ab

#### Max Frame Size

1.5 kB

### SERIAL INTERFACES

2 RS-232 ports

1 RS-485 (4-wire) + 1 RS-232 port

Serial transparent tunneling byte mode

Serial-to-Ethernet protocol gateway  
(IEC-60870-5-101, IEC-60870-5-104)

Modbus RTU/TCP and DNP3

Terminal server frame and byte mode

### CELLULAR MODEM

Dual-SIM cellular modem for HSPA+/EVDO or LTE networks  
(technology backward-compatible)

Configurable Cellular authentication using PAP or CHAP

### SIM Card

Mini SIM, 25 mm x 15 mm (0.98 in x 0.59 in)

Form Factor: 2FF

### NETWORKING

SCADA gateway for IEC101/104,  
Modbus RTU/TCP and DNP3

L3 mGRE DMVPN

L3 IPsec VPN

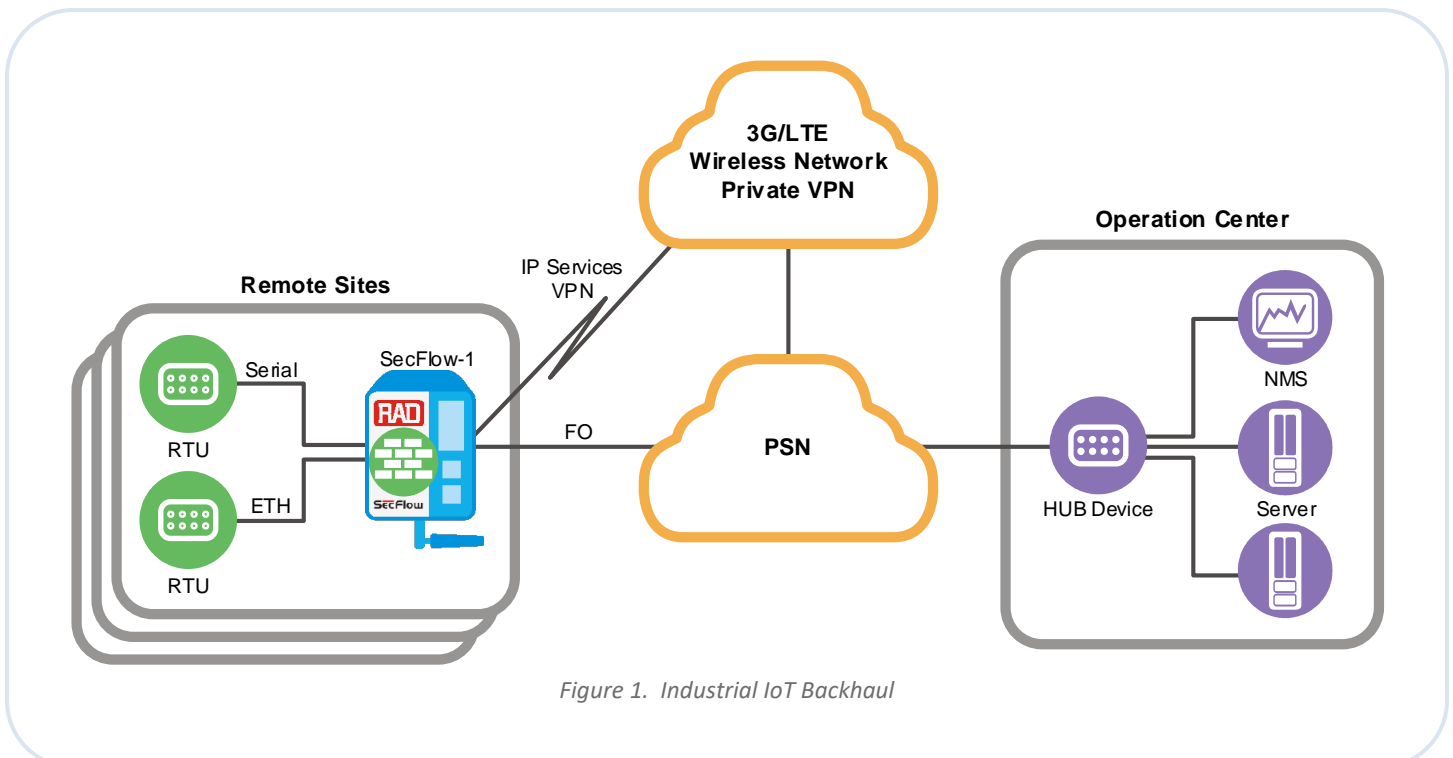


Figure 1. Industrial IoT Backhaul

# SecFlow-1

## Ruggedized SCADA-Aware Router Gateway

### ROUTER

Static routing, OSPFv2, BGP, VRF, IPv4, NAT

### MANAGEMENT

#### Authentication

Multi-user TACACS+ (up to 5 authorized users configured on the server or locally)

#### Control Port

Interface: RS-232

Connector: RJ-45

#### Management Options

RADview

Web-based interface using HTTP or HTTPS

CLI with password-protected access and authorization levels

SFTP

SSH

SNMPv3

Off-net Zero Touch

Reboot by an SMS message

### TIMING

Local time setting

Simple Network Time Protocol (SNTP)

### SECURITY

SFTP client

Stateful Firewall

#### IPsec

X.509 certification

### RESILIENCY

Conditioned/scheduled system reboot

OSPF v2

Cellular ISP redundancy (SIM cards backup)

Redundant VPN connectivity to SecurityGateway or other secure hub

### DIAGNOSTICS

Statistic counters per interface

Syslog

SNMPv3 GET and traps

LEDs

2 input and 2 output dry contacts

### GENERAL

#### Compliance

Rugged enclosure – fanless, IP30 rated

Substation automation per IEC 61850-3/ IEEE1613 EMI

Vibration and shock resistance per EN50121-4

#### Physical

DIN Rail

Height: 106 mm (4.17 in)

Width: 44.7 mm (1.76 in)

Depth: 120 mm (4.72 in)

Weight: 0.6–1.0 kg (1.3–2.2 lb)

#### Power

48 VDC: 20–60 VDC

24 VDC: 11–36 VDC

#### Power Consumption

8W

#### Environment

Temperature:

Operating: -40 to 70°C (-40 to 158°F)

Storage: -40 to 85°C (-40 to 185°F)

Operation humidity: up to 90%

### Ordering

#### **SF1/48VDC/1UTP1GBE/2RS232/HSPAP**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, cellular interface

#### **SF1/48VDC/1UTP1GBE/2RS232/LTENA**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE cellular modem with North American bands

#### **SF1/48VDC/1UTP1GBE/2RS232/LTEVZ**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE modem with North American Verizon bands

#### **SF1/24VDC/1UTP1GBE/2RS232/LTEVZ**

24 VDC (11-36 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE modem with North American bands Verizon bands

#### **SF1/48VDC/1UTP1GBE/2RS232/LTEEU**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE cellular modem with European bands

#### **SF1/24VDC/1UTP1GBE/2RS232/LTEEU**

24 VDC (11-36 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE cellular modem with European bands

#### **SF1/24VDC/1UTP1GBE/2RS232/HSPAP**

24 VDC (11-36 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, cellular interface

#### **SF1/48VDC/1UTP1GBE/2RS232**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces

#### **SF1/48VDC/1UTP1GBE/2RSM**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 1 RS-232 and 1 RS-485 serial interfaces

#### **SF1/24VDC/1UTP1GBE/2RS232**

24 VDC (11-36 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces

#### **SF1/48VDC/1UTP1GBE/2RS232/LTEOL**

48 VDC (20-60 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE cellular modem with Oceania and LATAM bands

#### **SF1/24VDC/1UTP1GBE/2RS232/LTEOL**

24 VDC (11-36 VDC), 10/100BASE-T Ethernet port and Gigabit Ethernet SFP port, 2 RS-232 serial interfaces, LTE cellular modem with Oceania and LATAM bands

### OPTIONAL ACCESSORIES

#### **CBL-SF-RJ45-CONSOLE**

Console port cable

#### **CBL-RJ45/DB9/NULL**

Serial port cable

#### **SF-AC-48VDC-40W**

AC to 48 VDC power supply, 40W, -20 to 60°C (-4 to 140°F); 20W at 60°C (140°F) and above

#### **RM-DIN-SINGLE**

Rack Mount adaptor for single DIN RAIL device

#### **RM-DIN-19**

19" Rack Mount adaptor for DIN RAIL device

#### **SF-ANT3G-2M**

Outdoor antenna for 3G cellular modem, 2m connecting cable

#### **SF-ANT3G-5M**

Outdoor antenna for 3G cellular modem, 5m connecting cable

#### **SF-ANT4G-2M**

Outdoor LTE antenna for 4G cellular modem, 2m connecting cable, 3dBi, 699-960 MHz/1710-2170 MHz/2500-2690 MHz

#### **SF-ANT4G-5M**

Outdoor LTE antenna for 4G cellular modem, 5m connecting cable, 3dBi, 699-960 MHz/1710-2170 MHz/2500-2690 MHz

#### International Headquarters

24 Raoul Wallenberg St., Tel Aviv 6971923, Israel  
Tel 972-3-6458181 | Fax 972-3-7604732  
Email [market@rad.com](mailto:market@rad.com)

#### North American Headquarters

900 Corporate Drive, Mahwah, NJ 07430, USA  
Tel 201-529-1100 | Toll Free: 800-444-7234 | Fax: 201-529-5777  
Email [market@radusa.com](mailto:market@radusa.com)



Your Network's Edge®

[www.rad.com](http://www.rad.com)

611-100-09/19 (4.4) Specifications are subject to change without prior notice. © 2013–2019 RAD Data Communications Ltd. RAD products/technologies are protected by registered patents. To review specifically which product is covered by which patent, please see [ipr.rad.com](http://ipr.rad.com). The RAD name, logo, logotype, and the product names MINID, Optimux, Airmux, IPmux, and MiCLK are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.