

Airmux-400A

ODU/F50W/50M/INT

Point-to-Point / SU Radio (Airmux-400A/ODU/F50W/50M/INT)

**AIRMUX**

Description

Airmux-400A/ODU/F50W/50M/INT is a carrier-class radio that belongs to the Airmux 5000/400 A-PRO Model.

Airmux-400A/ODU/F50W/50M/INT is a PtP outdoor radio unit that can be used as a PtMP Subscriber Unit (Guaranteed Service Level Agreement or Best Effort Service level).

The Radio complies with multiple regulation based on location.

Airmux-400A/ODU/F50W/50M/INT delivers up to 50 Mbps throughput and up to 500Mbps upgradeable by license key.

The radio is compatible with all 5GHz PtMP Base stations and PtP units.

The unit includes an integrated antenna.

Highlights

- Up to 50 Mbps net aggregated throughput (upgradeable to 500Mbps by license key)
- Telco-grade, extremely robust in harsh conditions
- Built-in GPS for intra and inter site TDD synchronization
- Configurable asymmetric throughput
- Advanced OFDM & MIMO technologies for operation in nLOS/NLOS and dense radio environments
- IP-67
- Simplified installation using a Smartphone app.
- Support AES 256 encryption over the air

ODU/F50W/50M/INT

Point-to-Point / SU Radio (Airmux-400A/ODU/F50W/50M/INT)

Specifications

Configuration						
Architecture	Outdoor Unit with an integrated antenna					
PoE to ODU Interface	Outdoor CAT-5e; Maximum cable length: 100m for 10/100BaseT and 75m for 1000BaseT					
Radio						
Max Capacity	50 Mbps net aggregate throughput. Upgradable to 500 Mbps with license key					
Range	Up to 120 km / 75 miles in PtP mode. Up to 40 km / 25 miles in SU mode *					
Channel Bandwidth	Configurable: 10, 20, 40, 80 MHz (for the default band); Dynamic Channel BW selection (20/40/80 MHz)					
Modulation	MIMO-OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)					
Adaptive Modulation & Coding	Supported					
Automatic Channel Selection	Supported upon power up					
DFS	Supported (FCC/IC, FCC, ETSI, ETSI, ETSI/GER, Nigeria, IC, IC, IL, Kazakhstan)					
Diversity	Supported					
Spectrum Viewer	Supported					
Max Tx Power	26 dBm per chain					
Duplex Technology	TDD					
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6					
Encryption	AES 256 in PtP mode, AES 128 in SU mode (Supports AES 256 by license, if BS supports AES 256)					
Uplink / Downlink Allocation	Configurable: Symmetric or Asymmetric					
Layer 2	HUB Mode					
QoS	Packet classification to 4 priority queues according to 802.1P or Diffserv					
VLAN Support	802.1Q, QinQ, 4094 VLANs					
TDD Intra Site Synchronization	Supported					
TDD Inter Site Synchronization	Supported through common GPS receiver per site					
ODU Management	IPv4/IPv6 dual-stack; DHCP client for SU (IPv4 only); SNMPv1, SNMPv3; HTTP/HTTPS using web browser;					
RADIUS Authorization	Supported					
RADIUS User authentication	Supported					
Syslog	Supported					
Option 82	Supported in SU mode					
Non PPPoE filtering	Supported in SU mode					
DHCP Filter	Supported in SU mode					
IGMP snooping	Supported in SU mode					
Nomadic subscribers	Supported in SU mode					
Dying gasp	**Supported (PoE voltage must be >= 55v)					
Supported Bands						
Band	CBW 5MHz [GHz]	CBW 10MHz [GHz]	CBW 20MHz [GHz]	CBW 40MHz [GHz]	CBW 80MHz [GHz]	Radio Compliance
4.9 GHz FCC/IC	-	4.940-4.990	4.940-4.990	4.940-4.990	-	FCC 47CFR Part 90 Subpart Y; ISED RSS-111
4.9 GHz IC	-	4.940-4.990	4.940-4.990	4.940-4.990	-	ISED RSS-111
4.9 GHz Universal	-	4.895-6.005	4.890-6.010	4.880-6.020	4.860-6.040	Universal
4.9 GHz Universal	-	4.900-4.995	4.900-4.995	4.900-4.995	4.900-4.995	Universal
5.1 GHz FCC	-	5.170-5.250	5.170-5.250	5.170-5.250	5.170-5.250	FCC 47CFR Part 15.407
5.1 GHz FCC	-	5.170-5.845	5.170-5.845	5.170-5.845	5.170-5.845	FCC 47CFR Part 15.407
5.1 GHz IC	-	5.170-5.250	5.170-5.250	5.170-5.250	5.170-5.250	SMSE-013-17
5.1 GHz UBR	-	5.125-5.880	5.125-5.880	5.125-5.880	5.125-5.880	Universal
5.1 GHz Universal	-	5.145-5.340	5.140-5.345	5.130-5.355	5.130-5.375	Universal
5.1 GHz WPC	-	5.150-5.875	5.150-5.875	5.150-5.875	5.150-5.875	WPC (India) G.S.R_1048(E) dated 22 October 2018
5.1 GHz WPC/UBR	-	5.150-5.875	5.150-5.875	5.150-5.875	5.150-5.875	Universal
5.2 GHz FCC/IC	-	-	5.255-5.340	5.255-5.340	5.250-5.340	FCC 47CFR Part 15.407
5.2 GHz IC	-	-	5.255-5.340	5.255-5.340	5.250-5.340	ISED RSS-247
5.4 GHz Australia	-	-	5.470-5.710	5.490-5.690	5.490-5.650	ETSI EN 301 893
5.4 GHz ETSI	-	5.475-5.705	5.470-5.710	5.490-5.690	5.490-5.650	ETSI EN 301 893
5.4 GHz FCC	-	-	5.480-5.715	5.480-5.715	5.485-5.715	FCC 47CFR Part 15.407
5.4 GHz IC	-	-	5.480-5.715	5.480-5.715	5.485-5.600	ISED RSS-247
5.4 GHz Kazakhstan	-	-	5.470-5.650	5.470-5.650	5.470-5.650	ETSI EN 301 893
5.4 GHz Universal (default)	-	5.470-5.725	5.465-5.730	5.455-5.740	5.455-5.760	Universal
5.7 GHz ETSI/GER	-	-	5.735-5.865	5.735-5.865	5.735-5.865	ETSI EN 302 502; ECC Recommendation (06)04
5.7 GHz IC	-	5.730-5.845	5.730-5.845	5.730-5.845	5.730-5.845	FCC 47CFR Part 15.407; ISED RSS-247
5.7 GHz IL	-	-	5.735-5.865	5.735-5.865	5.735-5.865	ETSI EN 302 502 with adaptation per Israeli Wireless Telegraph Regulations



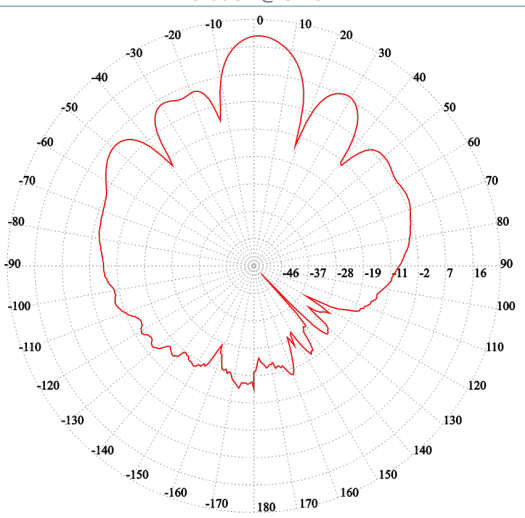
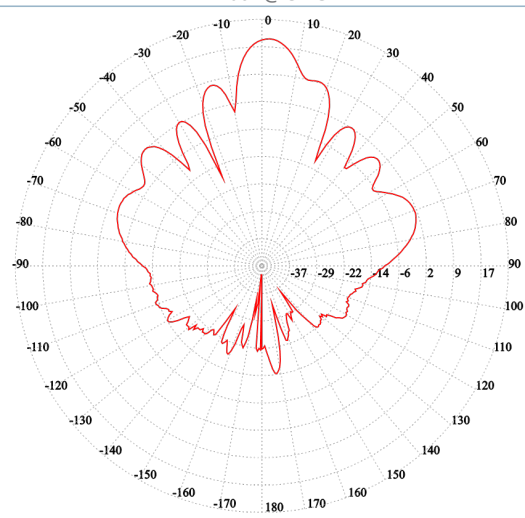
ODU/F50W/50M/INT

Point-to-Point / SU Radio (Airmux-400A/ODU/F50W/50M/INT)

5.7 GHz Nigeria	-	5.735-5.865	5.735-5.865	5.710-5.890	5.690-5.910	ETSI EN 302 502
5.8 GHz Australia	-	-	5.735-5.865	5.725-5.875	5.725-5.875	ETSI EN 302 502; ECC Recommendation (06)04
5.8 GHz ETSI	-	-	5.735-5.865	-	-	ETSI EN 302 502
5.8 GHz FCC/IC	-	5.730-5.845	5.730-5.845	5.730-5.845	5.730-5.845	FCC 47CFR Part 15.407; ISED RSS-247
5.8 GHz Kazakhstan	-	-	5.725-5.875	5.725-5.875	5.725-5.875	ETSI EN 302 502
5.8 GHz MII	-	5.725-5.850	5.725-5.850	5.725-5.850	5.725-5.850	CMIIT RTA
5.8 GHz Universal	-	5.725-5.850	5.725-5.850	5.725-5.850	5.725-5.850	Universal
5.8 GHz WPC	5.8275-5.8725	5.825-5.875	5.825-5.875	5.825-5.875	-	WPC (India) G.S.R 38(E) dated 19 January, 2007 Notification
5.9 GHz Universal	-	5.725-5.955	5.720-5.960	5.710-5.970	5.710-5.990	Universal
6.0 GHz Universal	-	5.695-6.055	5.690-6.060	5.680-6.070	5.680-6.090	Universal
Mechanical						
ODU Dimensions	32.5(w) x 32.5(h) x 6.7(d) cm					
ODU Weight	1.22 kg / 2.69 lbs					
Mounting Kit	Included					
Power						
Power Feeding	Power provided over ODU-IDU cable					
Power Consumption	<13W					
Network Device						
AC POE	RD-9921-102x (included)					
DC POE	RD-9921-2069					
Package Content						
Package	Radio unit with integrated antenna, pole/wall mounting kit, IP67 gland for POE port, 24V POE unit and AC Power cable					
Environmental						
Operating Temperatures	-40°C to 60°C / -40°F to 140°F					
Humidity	100% condensing, IP67 (totally protected against dust and against immersion in water up to 1m)					
MTBF	4,075,000 hours (Telcordia SR332 @25°C)					
Wind Resistance operational	180Km/h					
Safety						
EU/Intl	IEC 62368-1:2014, EN 62368-1:2014/A11:2017, IEC 60950-22:2016, EN 60950-22:2017					
Canada	CAN/CSA-C22.2 NO. 62368-1-14, CAN/CSA-C22.2 No. 60950-22:17					
USA	UL 62368-1:2014, UL 60950-22:2017					
EMC						
FCC	47 CFR, Part15, Subpart B, Class B					
ETSI	EN 301 489-1, EN 301 489-4, EN 301 489-17					
Canada	ICES-003 issue 7, CISPR 32, Class B					
AS/NZS	CISPR 32, Class B					

ODU/F50W/50M/INT

Point-to-Point / SU Radio (Airmux-400A/ODU/F50W/50M/INT)

Integrated Antenna	
Gain	21 dBi
Detailed Gain	4.900: 19.0dBi 4.950 - 5.050GHz: 18.0dBi 5.100 - 5.500GHz: 20.0dBi 5.550 - 5.800GHz: 22.0dBi 5.850 - 5.950GHz: 21.0dBi 6.000: 20.0dBi
VSWR	2.0 : 1
3 dB Azimuth Beamwidth	10 Deg. (Typ)
3 dB Elevation Beamwidth	Deg. (Typ)
Polarization	Dual Linear (Vertical and Horizontal)
Sidelobes Level	-12 dB(typ)
Cross Polarization	-25dB (typ)
F/B Ratio	-25 dB
Port To Port Isolation	30 dB (typ)
Lightning Protection	DC Grounded
Antenna Pattern	
Elevation @ 5.2GHz	Azimuth @ 5.2GHz
	

Ordering**Airmux-400A/ODU/F50W/50M/INT**

RAD A-PRO ODU, with an integrated antenna, supporting multi frequency bands at 5.x GHz.

* May be limited by regulation in the specific band being used

Datasheet information can be changed by manufacturer without prior notice