

ETX-2

# PM Controller



- Acts as generator for always-on and on-demand performance monitoring
- Monitors Key Performance Indicators in heterogeneous mobile backhaul networks
- Measures quality of experience in premium Carrier Ethernet and IP business services
- Monitors diagnostics and troubleshooting with multidimensional tools
- Allows online access and generates scheduled reports for service providers and end customers.

The ETX-2 PM Controller is a high capacity, central generator for always-on performance monitoring (PM), on-demand testing, diagnostics, and troubleshooting of mobile backhaul networks, as well as for premium Carrier Ethernet and IP business services. It uses a wide variety of standard tools to provide deep visibility into network and service performance, ensure optimal quality of experience for users of LTE/LTE-A backhauling networks, and support rapid small cell deployments.

## INTEROPERABILITY

As part of RAD's Service Assured Access offering, the ETX-2 PM Controller interoperates with routers, switches, mobile base stations, and third-party responders, as well as with RAD's ETX-2 and MiNID NIDs. As a non-disruptive add-on, the ETX-2 PM Controller is an ideal solution for existing heterogeneous networks. It enables top-line PM and testing in a dynamic environment, regardless of the capabilities of the underlying installed base.

## MONITORING AND DIAGNOSTICS

As a member of RAD's ETX-2 family of IP and Carrier Ethernet demarcation devices, the PM Controller also offers service demarcation and monitoring capabilities for Carrier Ethernet 2.0 services and IP services in complex topologies. This includes high scale, multi-layer OAM and PM tools with hardware-based monitoring and diagnostics

at high precision. End-to-end connectivity OAM and testing tools ensure flow-level fault management and performance monitoring over Layer-2 and 3 networks and also quickly detect connectivity failures and performance degradation. Layer-2 and 3 wire-speed loopbacks offer flexible diagnostic tools.

For more information on ETX-2 capabilities, refer to ETX-2 [datasheet](#).

## MANAGEMENT AND SECURITY

PM Controller is managed by RADview Network Management System and Performance Monitoring Portal, offering real-time monitoring of Ethernet and IP service performance SLA reports. It can also be managed by any SNMP-based management system. PM controller supports a variety of access protocols, including Telnet, SNMPv3, and TFTP. Security features include SNMPv3, RADIUS (client authentication), TACACS+ (client authentication, authorization, and accounting), SSH, and SFTP. Access Control Lists (ACL) can also be used to flexibly filter and mark management traffic, enabling service providers to maintain network security by dropping unwanted packets.

## Specifications

### ETHERNET INTERFACES

#### Number of Ports

Four FE/GbE combo ports

#### Type

SFP or Copper

### MONITORING AND DIAGNOSTICS

- IPv4 and IPv6 frame format
- L2: untagged, tagged.

#### L3 Performance Monitoring

- Protocols: RFC-5357 TWAMP "full" and "light" modes, UDP Echo, ICMP ping
- Total number of controllers: 64
- Total number of peers: 3000
- Total number of test sessions: 3000 (@10PPS)
- Packet rate: configurable between 1 to 10PPS.

#### Service Activation Tests

RFC-2544: 8 built-in wire-speed testers  
ITU-T Y.1564 over L2 or L3

#### Monitoring

L3 monitoring includes:

- Monitored Statistics: Loss, Availability, Delay, PDV, IPDV with current and interval statistics; two-way and one-way TWAMP for all statistics
- Counters: Fragmented packets, reorders, duplication; two-way and one-way TWAMP for all counters
- User configurable test packet size



Your Network's Edge

# ETX-2 PM Controller

## Reporting

SLA and quality of experience (VoLTE mean opinion score) reporting with aggregated and drill-down views per PM session by RADview PM portal

## MANAGEMENT AND SECURITY

Out-of-band management via RS-232 and Ethernet ports

In-band management over management flow

## GENERAL

### Physical

Height: 43.7 mm (1.7 in)  
Width: 440 mm (17.4 in)  
Depth: 240 mm (9.5 in)

## Power

AC power supply:  
100–240 VAC, 50/60 Hz

## Power Consumption

90W max

## Environment

Temperature: 0–45°C (32–113°F)  
Humidity: Up to 90%, non-condensing

## COMMON ETX-2 CAPABILITIES

For Carrier Ethernet, bridging, and other common capabilities of the ETX-2 product line, refer to the ETX-2 [datasheet](#).

## Ordering

### ETX-205A/AC/19V/DC2X/128S/PMC

AC power supply, dual core 2.5 GHz x86 processor, 128 GB solid state disk (SSD), high-scale PM controller application

## SUPPLIED ACCESSORIES

AC power cord

### CBL-RJ45/D9/F/6FT

Control port cable with male RJ-45 and female DB-9 connector

### RM-34

Hardware kit for mounting one 19" ETX-205A unit in a 19" rack

## OPTIONAL ACCESSORIES

### RM-34-23

Hardware kit for mounting one 19" ETX-205A unit in a 23" rack

### WM-34

Wall-mount hardware kit for one 19" ETX-205A unit

666-101-02/24 Specifications are subject to change without prior notice. © 1988-2024 RAD Data Communications Ltd. This product is protected by patents, see forrad.com. The RAD name, logo, logotype, and the terms EtherAccess, TDMLoP and TDMLoP Driven, and the product names Optimux and Irmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

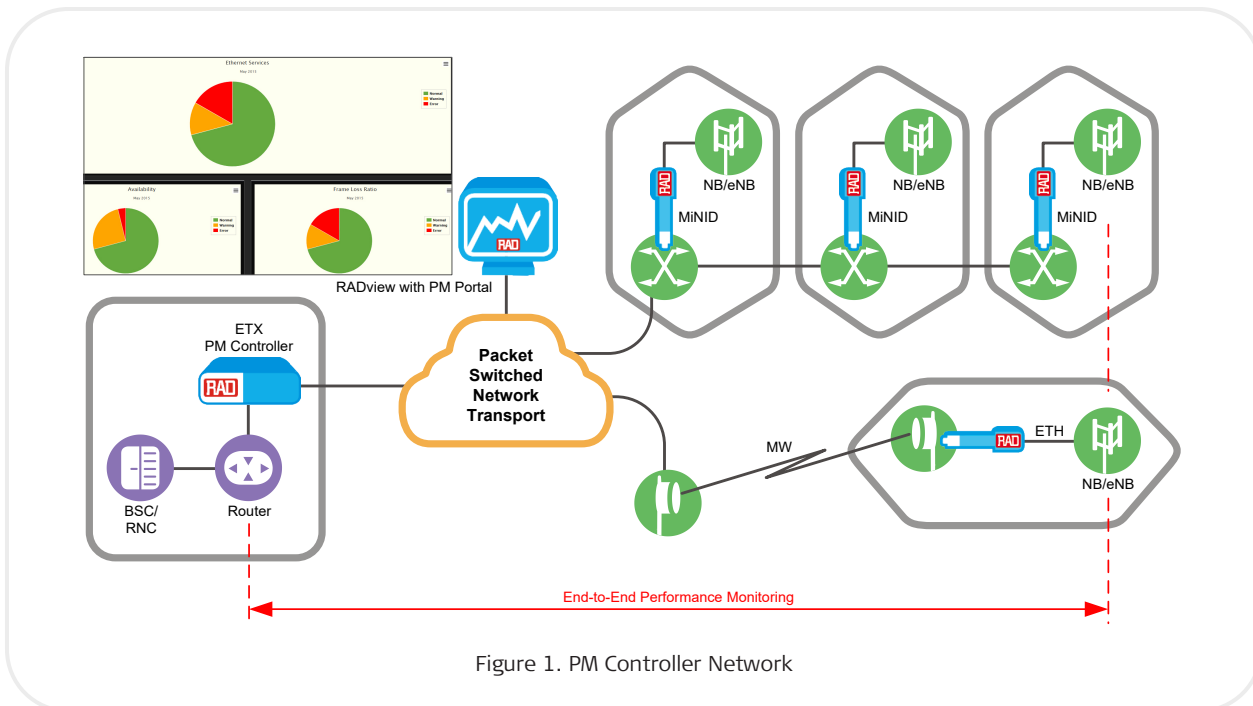


Figure 1. PM Controller Network

## International Headquarters

24 Raoul Wallenberg St.  
Tel Aviv 6971920, Israel  
Tel/Fax 972-52-4748272  
Fax 972-3-6498250  
E-mail market@rad.com

## North American Headquarters

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@radusa.com

[www.rad.com](http://www.rad.com)

Order this publication by Catalog No. 805055



Your Network's Edge